

**Pallas
200-210G
SBW**



Naps Pallas 200-210G SBW


Naps Systems' 30 years of solar power experience in all continents and conditions provide the highest level of quality and power in an attractive and dependable package.

High power and efficiency

Naps Pallas series of solar modules contain 54 high efficiency dark blue polycrystalline solar cells. The cells are carefully selected to assure a narrow and positive power range, thus minimising mismatch losses in the system.

Dependable construction and long life

Featuring the highest standards of construction and materials, Naps Pallas solar modules are able to withstand the harshest environments and continue to perform efficiently. Properly installed, these modules have a design life well beyond the power warranty. Limited power warranties are given for both 10 and 25 years. The modules are tested to meet or exceed all relevant international standards and the highest requirements for quality and performance.

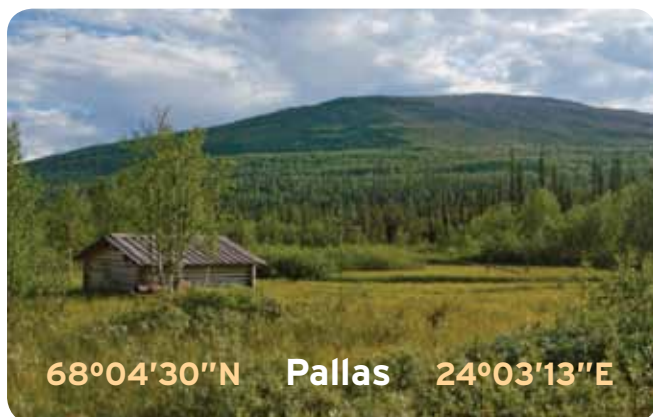

68°04'30"N Pallas 24°03'13"E

Glass type:

S
SMOOTH

Frame colour:

B
BLACK

Backsheet colour:

W
WHITE

- Carefully selected polycrystalline silicon solar cells for close tolerance
- Solar cells treated for reduced reflection and for efficient conversion of both direct and diffuse light
- Electrical circuit laminated between layers of ethylene vinyl acetate (EVA) for electrical isolation, moisture resistance and UV stability
- Low iron content, tempered glass for mechanical protection and high light transmission
- Multi-layered polymer backsheet for resistance to abrasion, tears and punctures and dependable electrical insulation
- Rugged and lightweight anodised aluminium frame with mounting, grounding and drainage holes
- Junction box with pre-fitted cables and quick connectors designed for ease and safety
- Wired-in bypass diodes to reduce potential loss of power and damage from partial array shading
- Tested for a wide range of operating conditions (-40°C to +85°C)
- Tested to withstand the highest wind, hail storm and snow load requirements (5400 N/m²)
- Designed to meet or exceed the environmental requirements of IEC61215
- Designed to meet the requirements of IEC61730, including Safety Class II to IEC61140

www.napssystem.com

NAPS 
Power of Light

Specifications: Naps Pallas 200-210G SBW

Performance at STC


	200G SBW	205G SBW	210G SBW
Product code	N00354	N00355	N00356
Maximum power (W/Pmax)	200	205	210
Maximum power tolerance (W)	+5/-0	+5/-0	+5/-0
Current (typical at max power) (A/Ip)	7.70	7.89	8.07
Voltage (typical at max power) (V/Vp)	26.0	26.0	26.0
Short circuit current (typical) (A/Isc)	8.35	8.52	8.69
Open circuit voltage (typical) (V/Voc)	33.3	33.3	33.4
Module efficiency (minimum) (%)	13.8	14.2	14.5
Module efficiency (maximum) (%)	14.2	14.5	14.9

Performance at NOCT and 800 W/m²


	200G SBW	205G SBW	210G SBW
Maximum power (W/Pmax)	143.7	147.5	151.2
Current (typical at max power) (A/Ip)	6.11	6.26	6.42
Voltage (typical at max power) (V/Vp)	23.5	23.5	23.6
Short circuit current (typical) (A/Isc)	6.76	6.89	7.03
Open circuit voltage (typical) (V/Voc)	30.4	30.5	30.6




Module Dimensions

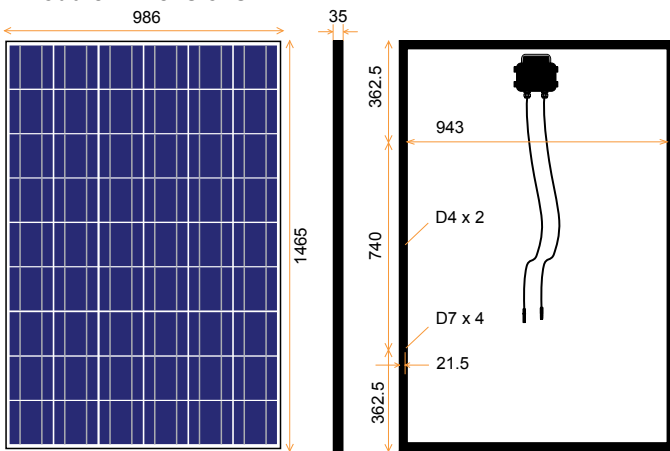

Voltage / Current Dependence on Temperature

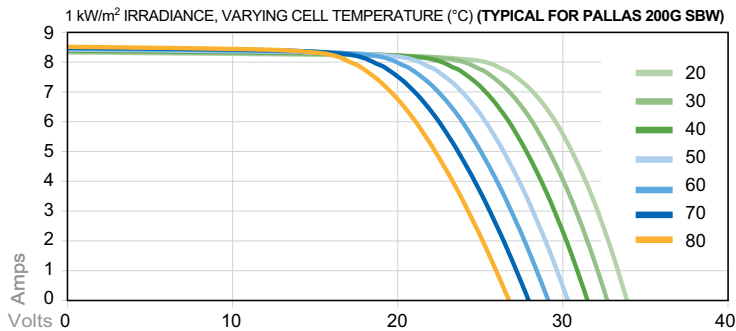

Voltage / Current Dependence on Irradiance

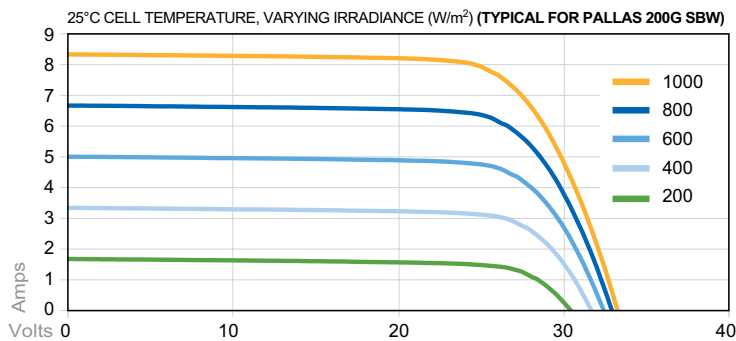

Mechanical Details

Overall length (mm)	1465
Overall width (mm)	986
Area (m ²)	1.444
Thickness at edge (mm)	35
Weight (kg)	19.4

Construction

Cell type	polycrystalline
Cells	54
Cell dimensions (mm)	156 x 156
Cell electrical circuit (series x parallel)	54 x 1
Cell layout (horizontal x vertical)	6 x 9
Glass thickness (mm)	4.0
Junction box type	S PV1410-2
Bypass diodes factory fitted	3
Cables (4.0 mm ²)	2 x 1 m
Connector type	H+S Radox push-pull 4mm
Other connector options available to special order	

Protection Class

IEC61730 Application Class A, equivalent to Safety Class II

Maximum System Voltage

Voltage (V)	1000
-------------	------

Overcurrent Protection

Series fuse protection rating (A)	15
Reverse current maximum (A)	15

Mechanical Load

Tested to (N/m ² = Pa)	5400
According to IEC 61215-2 extended test for heavy snow load	

Temperature Coefficients at STC type

Open circuit voltage (V/K)	-0.120
Short circuit current (A/K)	0.0039
Maximum power (%/K)	-0.54

Efficiency Reduction from STC

Reduction (approximately) (%)	5
Cell temperature (°C)	25
Irradiance change (W/m ²)	from 1000 to 200
Air Mass	1.5

STC = Standard Test Conditions

Cell temperature (°C)	25
Irradiation (W/m ²)	1000
Air Mass	1.5

NOCT = Normal Operating Cell Temperature

Cell temperature (°C)	46
Irradiation (W/m ²)	800
Ambient temperature (°C)	20
Wind speed (m/s)	1
Free air access to module rear	

